


698-2700MHz Low PIM Slim Omni Antenna


Model: SRFS-698/2700-4A-LP

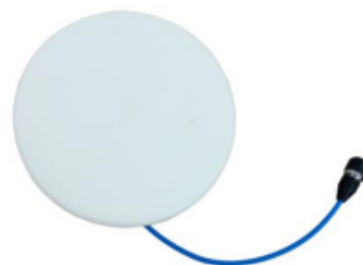


Performance Specifications				
Frequency Range, MHz	698-960	1690-2170	2300-2500	2500-2700
Gain, dBi	3.0	4.0	4.0	5.0
VSWR	≤1.8	≤1.8	≤1.8	≤1.8
Polarization	Horizontal			
PIM, 3rd Order, 2x20W	≤-150 dBc			
Horizontal Beamwidth	360°			
Vertical Beamwidth	120°	85°	76°	70°
Input Impedance	50 Ω			
Max.Power	50 W			
Lightning Protection	DC Ground			

Mechanical Specifications

Connector	N-Female/ 4.3-10 DIN Female
Dimensions	∅190x7.3 mm
Weight	0.25 kg
Color	White
Reflector Material	PCB
Radome Material	ABS (UV Stabilized)
Operating Temperature	-40°C to +65 °C



H-Plane



V-Plane