

## Applications

- 2.4 GHz ISM band
- IEEE 802.11b/g/n wireless LAN Wi-Fi applications
- Public wireless hotspots
- Wireless video systems
- Multipoint and mobile applications

## Features

- High performance – 2 dBi
- Rubber duck design
- SMA (M) St. Connector
- Optional magnetic mounts available

## Description


This compact 2.4 GHz Omni-directional "Rubber-Duck" Wi-Fi antenna provides broad coverage and 2 dBi gain. It is a coaxial sleeve design with an Omni-directional pattern. It is ideally suited for IEEE 802.11b and 802.11g wireless LANs, Bluetooth® and other WLAN applications



### 2.4 GHz 2 dBi Rubber Duck Antenna Model No – SRFS 2400/2500 -2A/RD

Electrical Specification	
Frequency Range	2400 ~ 2500 MHz
Gain	2 dBi
V.S.W.R	2.0
Polarization	Vertical
Impedance	50 Ω
Lightning Protection	Direct Ground
Maximum Input Power	50 W
Directional	Omni
Mechanical Specification	
Radom Material	ABS
Connector	SMA M St.
Color	Black
Humidity	5~95%
Operating Temperature (°C)	-40°C ~ 85°C
Environmental Friendly	ROHS Compliant

### RF Antenna Pattern

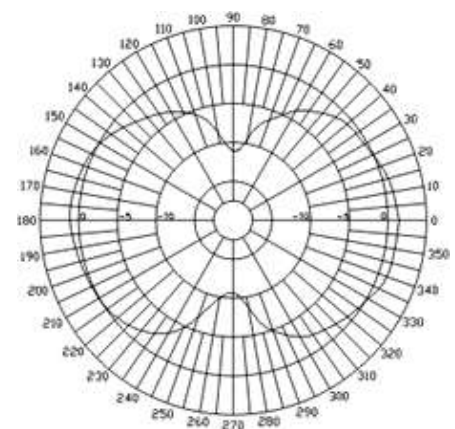

**Vertical**