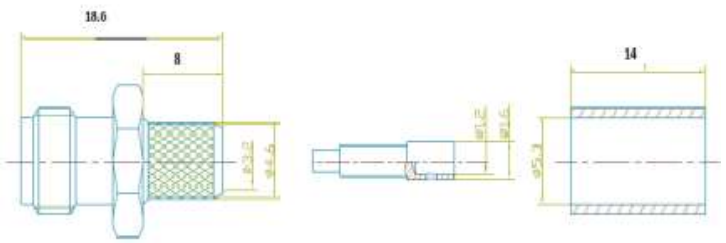

SMA Female Crimp For RG58 / LMR 200 CABLE

Part No. SRFS- SMAFBHRG58-06

Electrical & Mechanical Specifications	
Characteristics Impedance	50 ohm
Frequency Range	DC-6GHz
VSWR	≤1.15@DC-6GHz
Dielectric Withstanding Voltage	≥1000Vrms, 50 Hzat sea level
Working Voltage	335V RMS,50Hz,at sea level
Contact Resistance	Center Contact ≤3mΩ Outer Contact ≤2.5mΩ
Dielectric Resistance	≥5000MΩ
Durability	Mating Cycles ≥500

Material & Plating		
	Material	Plating
Body	Brass	Au
Insulator	PTFE(Teflon)	—
Center conductor	Phosphor Copper	Au

Environmental	
Temperature Range	-40℃～+85℃
Humidity	5~95 %
RoHS	Compliant Yes

PLOT NO. 5, SHOP NO. 606, PRADHAN CHOWK,VIKAS NAGAR,UTTAM NAGAR, NEW DELHI-110059
MOB: +91-8800726650/+91-9027232570,
EMAIL:info@signityrfsolutions.com,WEBSITE:http://signityrfsolutions.com/