


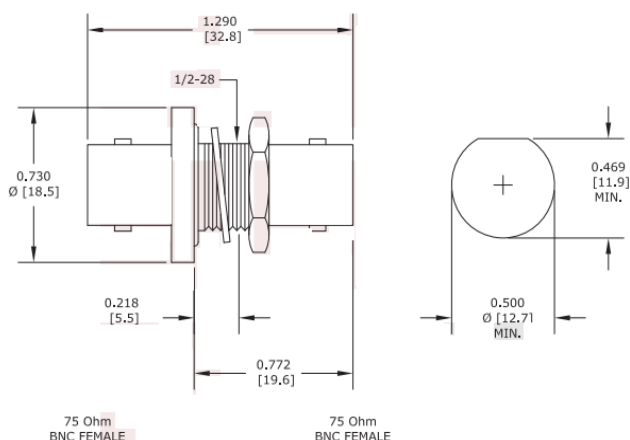

BNC FEMALE TO FEMALE BULKHEAD ADAPTOR (SRFS-BNCFFBH-02)

Electrical & Mechanical Specifications

Characteristics Impedance	50 Ω
Operating Frequency Range	DC-2GHz
VSWR	1.2:1
Dielectric Withstanding Voltage	$\geq 1500V$ RMS, 50Hz, at sea level
Insertion Loss	0.20 dB
Contact Resistance	Center Contact ≤ 1.0 m Ω Outer Contact ≤ 0.25 m Ω
Dielectric Resistance	$\geq 5000M\Omega$
Durability	Mating cycles ≥ 500

Material & Plating

	Material	Plating
Body	Brass	Ni
Contact	Brass	Ag
Insulator	PTFE	-
Outer Contact	Brass	Ni

Environmental Specification

Temperature Range	-65°C~+165°C
RoHS Compliant	Yes