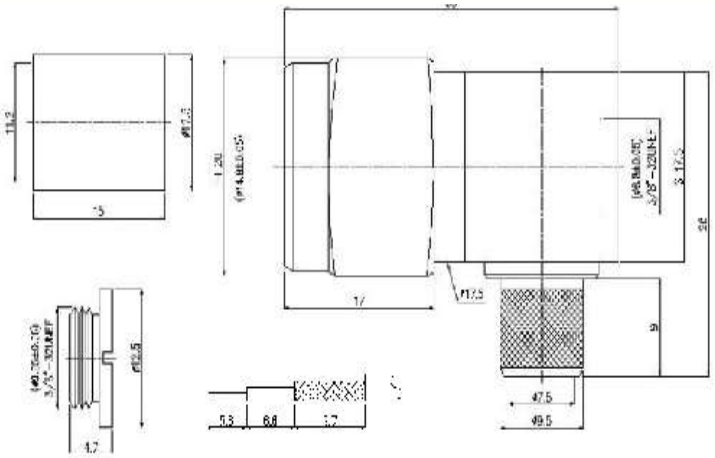

N Male R/A for LMR 400 Crimp Connector

Electrical & Mechanical Specifications	
Characteristics Impedance	50 ohm
Frequency Range	DC 7.5 GHz
VSWR	≤1.10@DC-3GHz
Dielectric Withstanding Voltage	2500Vrms, 50 Hz at sea level
Test Voltage DC	2000 V
Contact Resistance	Center Contact ≤ 1 mΩ Outer Contact ≤ 0.25 mΩ
Dielectric Resistance	≥5000MΩ
Average Power	0.6 KW @ 900 MHz
Peak Power	10.00 KW
Durability	Mating cycles ≥500

Material & Plating		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	—
Contact	Brass	Au
Ferrule	Brass	Ni

Environmental	
Temperature Range	−40℃～+85℃
RoHS	Compliant Yes

PLOT NO. 5, SHOP NO. 606, PRADHAN CHOWK,VIKAS NAGAR,UTTAM NAGAR, NEW DELHI-110059
MOB: +91-8800726650/+91-9027232570,
EMAIL:info@signityrfsolutions.com,WEBSITE:http://signityrfsolutions.com/