


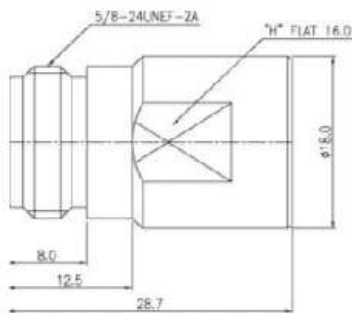

Low PIM 2 Watt N Dummy Termination Load 50 ohm N Female Terminator (SRFS-2-18-N F)

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

Electrical & Mechanical Specifications

Frequency Range	DC~18 GHz
VSWR	≤1.18:1
Average Power	2 Watt
Impedance	50 Ω
Peak Power	5μs:0.1KW
3rd Order IMD	≤-105dBc @2x43dBm
Connector	N Female

Material & Plating

	Material	Plating
Connector Body	Brass	Ternary Plating
Insulator	PTFE	-
Center Contact	Beryllium	Au
Hex Nut	Brass	Ternary Plating

Environmental

Operating Temperature	-65°C~+85 °C
Relative Humidity	5%-95%
RoHS	Compliant Yes