


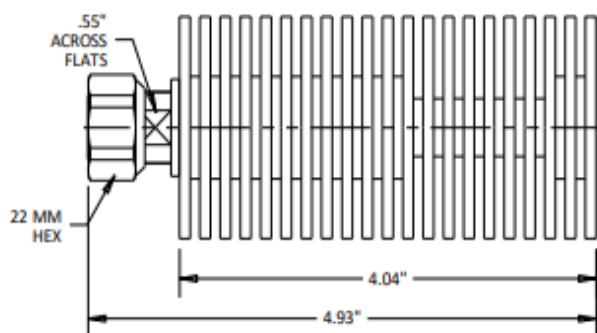

Low PIM 50 Watt DIN Dummy Termination Load 50 ohm DIN Male Terminator (SRFS-50-03-DINM)

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

Electrical & Mechanical Specifications

Frequency Range	DC~3GHz
VSWR	≤ 1.20
Average Power	50 Watt
Impedance	50 Ω
Peak Power	5 μ s:0.1KW
3rd Order IMD	≤ -105 dBc @2x43dBm
Connector	DIN Male

Material & Plating

	Material	Plating
Body	Brass	Tri Metal(Cu/Sn/Zn)
Contact	Brass	Au
Dielectric	PTFE	-

Environmental

Operating Temperature	-65°C ~ +85 °C
Relative Humidity	5%-95%
RoHS	Compliant Yes