


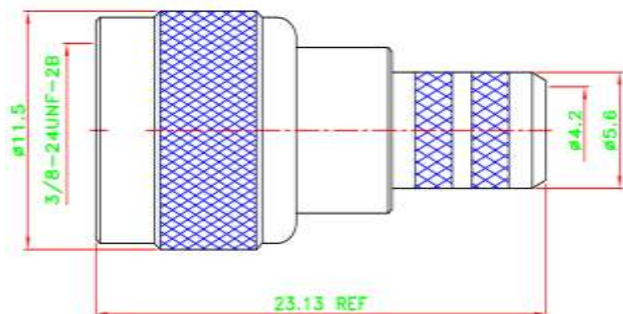

MINI-UHF MALE CRIMP CONNECTOR LMR 240

Electrical & Mechanical Specifications		
Frequency Range		DC to 2.5 GHz
Impedance		50Ω
VSWR		1.25 Max
Voltage Rating		330 Vrms
Dielectric Withstanding Voltage		1000 Vrms
Insertion Loss		0.20 dB
Cable Attachment		Hex Braid Crimp
Center Conductor Attachment		Crimp or Solder
Cable Retention		40 lbs. Pull
Material & Plating		
	Material	Plating
Connector Body	Brass	Ni
Contact	Brass	Au
Insulator	Teflon	-
Ferrule	Copper	Ni

Environmental	
Operating Temperature	-55°C~+85 °C
RoHS Compliant	Yes