


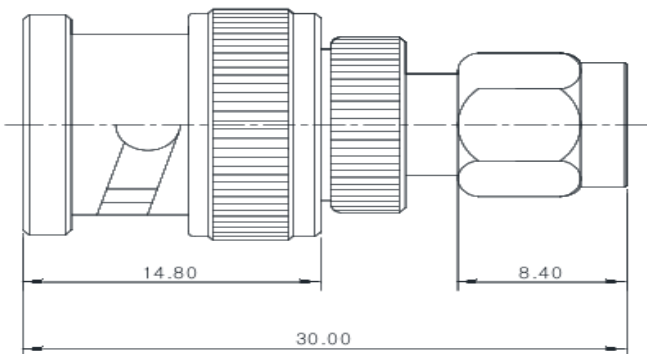

SMA Male to BNC Male Adapter Part No. SRFS SMABNC MM 03

Electrical & Mechanical Specifications		
Characteristics Impedance		50 Ω
Frequency Range		DC-3 GHz
VSWR		1.20:1
Working Voltage		335V max
Dielectric Withstanding Voltage		≤ 1000V RMS,50Hz,at sea level
Insulation Resistance		≥5000M OHM
Contact Resistance		Center Contact ≤ 3mΩ Outer Contact ≤ 2 mΩ
Dielectric Resistance		≥5000MΩ
Durability		Mating cycles ≥500
Material & Plating		
	Material	Plating
Body	Brass	Ni & Au
Insulator	PTFE	—
Center Contact (pin)	Brass	Au
Environmental		
Temperature Range		- 55℃ ~ +165 ℃
RoHS		Compliant Yes