
Signity RF Solutions



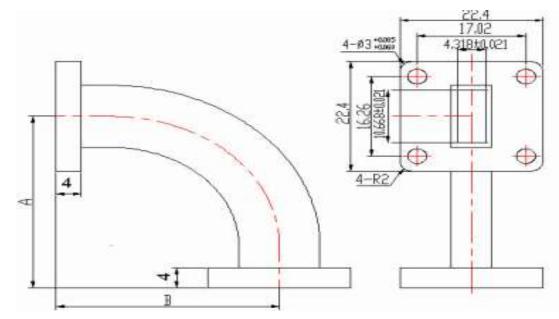

WR42 WAVEGUIDE H-BEND

| Mechanical Specification | |
|--------------------------|--------------------------|
| Waveguide Type | WR42 |
| Material | Copper |
| Inside Finish | Silver Plating |
| Outside Finish | Anticorrosion Grey Paint |
| Flange Type | FBP220 (Cover) |
| Dimensions | A=35 mm, B=35 mm |

| Electrical Specification | |
|--------------------------|---------------|
| Frequency Range | 17.6-26.7 GHz |
| VSWR (Max) | 1.10 |

Signity RF Solutions offers a standard product line of *E Bend and H Bend covering waveguide* sizes WR10 thru WR430. Additional size and Configuration can be custom made as per customer's specific requirements.

PLOT NO. 5, SHOP NO. 606, PRADHAN CHOWK,VIKAS NAGAR,UTTAM NAGAR, NEW DELHI-110059 MOB: +91-8800726650/+91-9027232570, EMAIL:info@signityrfsolutions.com,WEBSITE:http://signityrfsolutions.com/